



FLUXX® Dispensing Taps

Series AH 23

Scope of application

The innovative FLUXX® Dispensing Taps perfectly facilitate the easy, fast and clean decanting of liquids without gurgling. Series AH 23 is designed to support the dosing of large amounts of liquids within a short period of time. The beveled outlet also easily fits into narrow bottle necks.

Broad product portfolio

Our FLUXX® Dispensing Taps are suitable for various containers – bottles, canisters, drums and IBC's – with an external thread ranging from DIN 45 to DIN 71 as well as plastic and steel drums with an 3/4" internal thread.

Unique ventilation system

The outstanding flow properties are based on the unique ventilation system from SABEU. Thanks to this, FLUXX® Dispensing Taps AH 23 series have a high flow rate of ≥ 5 L / min.








No leaking

FLUXX® Dispensing Taps have a high impermeability even with aggressive chemicals and strongly seeping liquids.

Declaration of food conformity







All products comply with regulations EU no. 10/2011, EC no. 1935/2004 as well as LFGB and are fit for human consumption under the food law as well as from a physiological point of view – inspected and approved by certified testing institutes. In addition, selected products fulfil further international regulations – especially according to FDA as well as Mercosur – and are available upon request.

Benefits

-  Easy, fast and clean dispensing without gurgling
-  Available for all common thread sizes
-  Drip-off edge for convenient and clean dosing – even in DIN 28 bottle necks
-  Smooth moving lever for easy operability
-  High flow rates
-  Resistance to a multitude of chemicals
-  Declaration of food conformity

Application examples


Decanting especially of:

-  Liquid food
-  Hygiene and care products
-  Cleaners
-  Agrochemicals
-  Engine and gear oil
-  Industrial chemicals



FLUXX® Dispensing Taps

Series AH 23

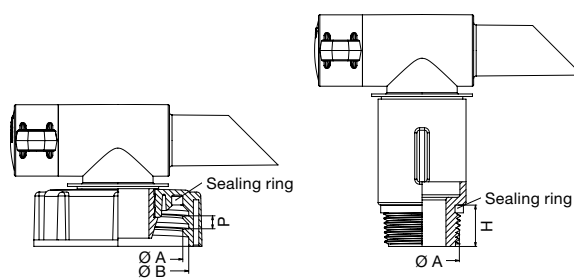

Product portfolio

Description	Picture	Item number	Quantity per carton	Dimensions
AH 23/45 for DIN 45 thread		410 124	350 pcs.	Ø A = 41.1 mm / Ø B = 45.1 mm P = 4 mm (Thread pitch)
AH 23/50 for DIN 50 thread		410 224	275 pcs.	Ø A = 46.1 mm / Ø B = 50.1 mm P = 4 mm (Thread pitch)
AH 23/51 for DIN 51 thread		407 124	250 pcs.	Ø A = 50.2 mm / Ø B = 54.8 mm P = 5 mm (Thread pitch)
AH 23/61 for DIN 61 thread		408 124	200 pcs.	Ø A = 55.6 mm / Ø B = 60.5 mm P = 6 mm (Thread pitch)
AH 23/63 for DIN 63 thread		410 426	150 pcs.	Ø A = 60.7 mm / Ø B = 64.5 mm P = 4.2 mm (Thread pitch)
AH 23/71 for DIN 71 thread		410 320	125 pcs.	Ø A = 67.0 mm / Ø B = 72.3 mm P = 7 mm (Thread pitch)
AH 23/ 3/4" with 3/4" external thread		409 120	250 pcs.	Ø A = R 3/4" BSP thread ‡ H = 16 mm
AH 23/ 3/4" on 2" Mauser thread		409 220 – Rough thread	175 pcs.	Ø A = R 3/4" on S 70x6 rough thread
AH 23/ 3/4" on 2" Trisure thread		409 320 – Rough thread 409 420 – Fine thread	175 pcs.	Ø A = R 3/4" on 2" PPS rough or fine thread
Protective cap AH 23		999 008	Upon request	Suitable for all Dispensing Taps AH 23

Materials

Housing, cover cap, adapter, sealing ring for plug, "cap nut AH 23/63":	Polyethylene (PE)
Lever, cap nut, plug:	Polypropylene (PP)
Sealing rings for adapter and cap nut:	EPE
Sealing ring for "cap nut AH 23/63":	EPDM

Colors

Cap nut:	Red / Black
Lever, cover cap:	Red
Housing, adapter, plug, "cap nut AH 23/63":	Natural
Other colors upon request.	



Chemical resistance

Our products achieve a high chemical resistance to many liquids. However, we cannot guarantee comprehensive chemical resistance of specific applications. Therefore, we recommend individual testing of customer applications prior to use – with the support of our experts.